


OPERATING MANUAL - ASC BATTERY INFLATOR

This Inflator is intended for inflating / deflating Dunnage Airbag.


Includes:

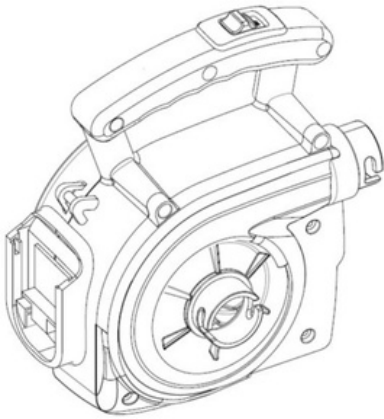


1 x Inflator




1 x Lithium Battery



1xFlexible Hose

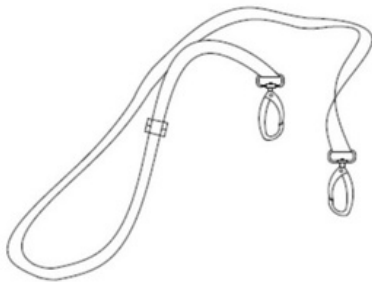

1 x Strap

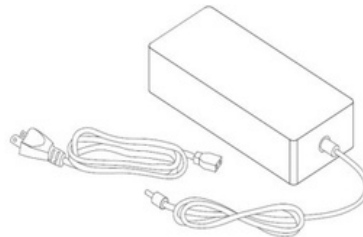


1 x Charger

Technical Specifications


Weight (including battery):	2.45 kg
Air Flow:	70 m3 / hour
Battery Voltage / Capacity:	24V / 5.2 Ah
Recharging Time:	4 hours



Parts and Controls

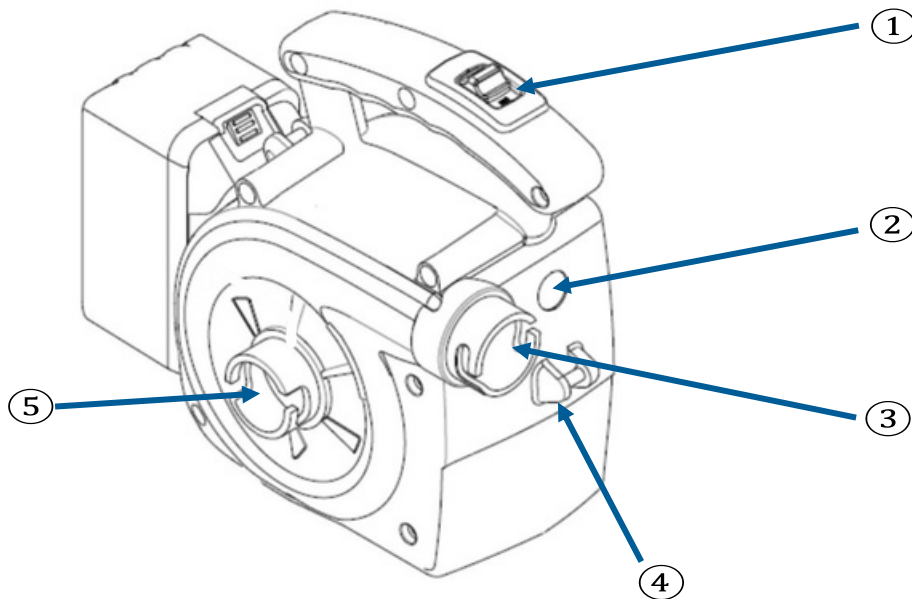

- 1. Switch
- 2. LED Light
- 3. Inflation Port
- 4. Strap holder
- 5. Deflation Port

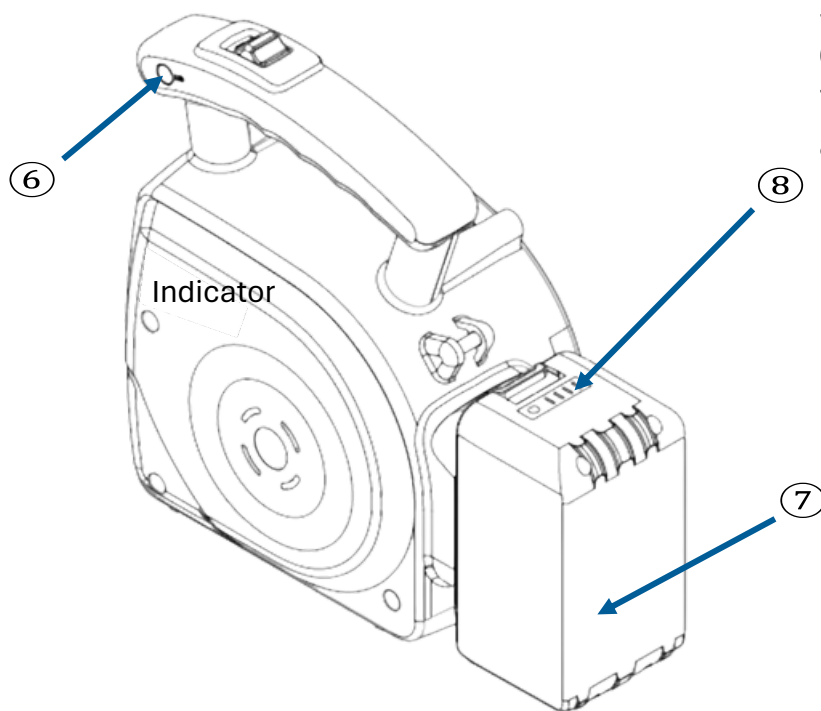

Protection Experts
P.O.Box 2143
Normanhurst NSW 2076



02 994 50593



sales@pro-ex.com.au



www.pro-ex.com.au




ABN # 41654089120


Operating Instructions

Installation and Inflation

1. Attach battery – slide the battery in until it clicks, check the Battery Level LED's
2. Connect Flexible Hose to the Inflator – push and twist the hose onto the Inflation Port.

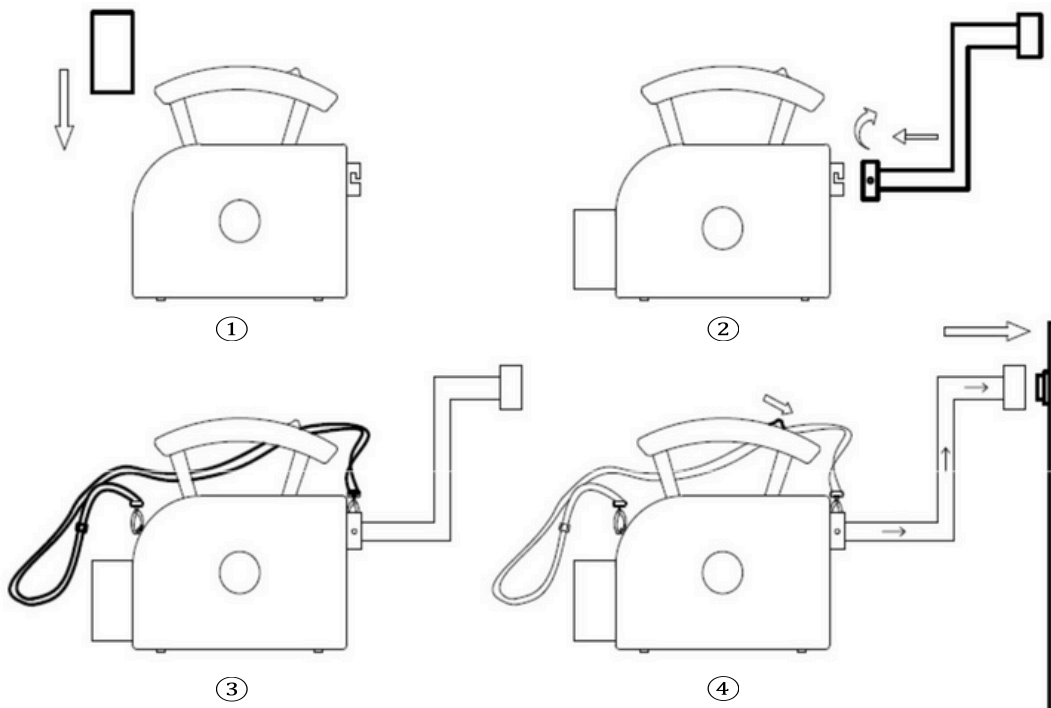


3. Fit strap – attach the clips through the Strap Holder and secure.
4. Attach Flexible Hose to Dunnage Bag – seat the hose firmly on the bag valve.
5. Inflate by turning the switch on.
6. Reminder of completion of inflation.

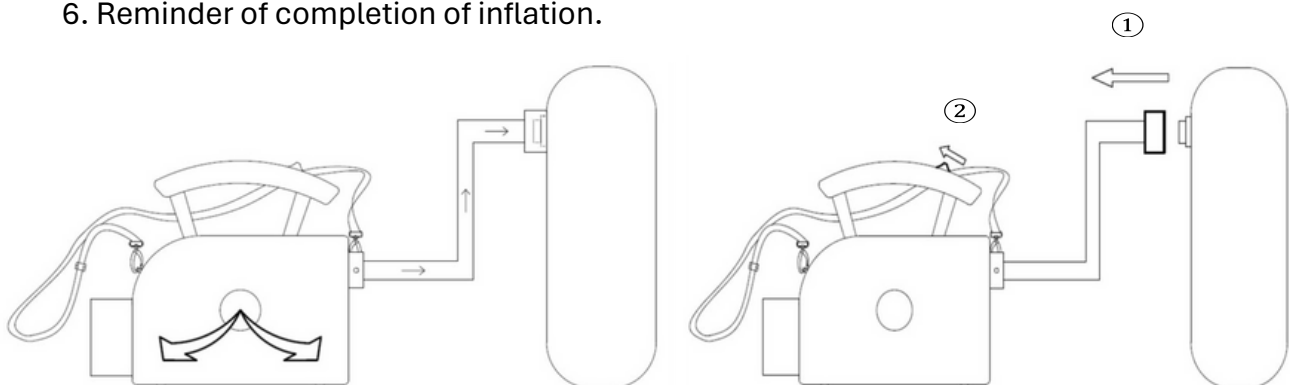


7. Disconnect the valve from the bag, then switch the inflator off.




Deflation

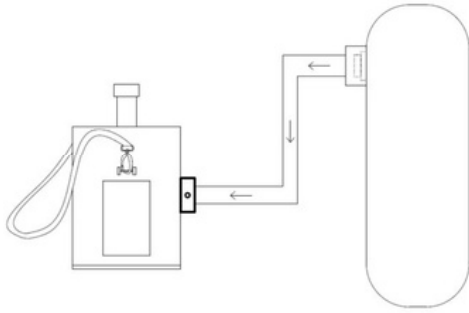


Lighting

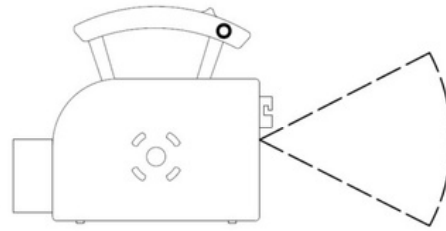


Inflator head can be hooked to the strap

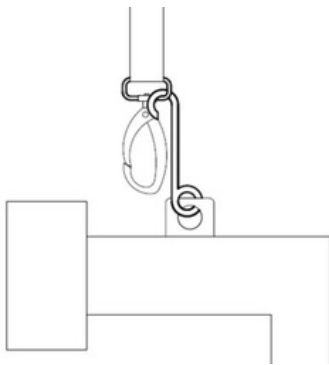

Charger

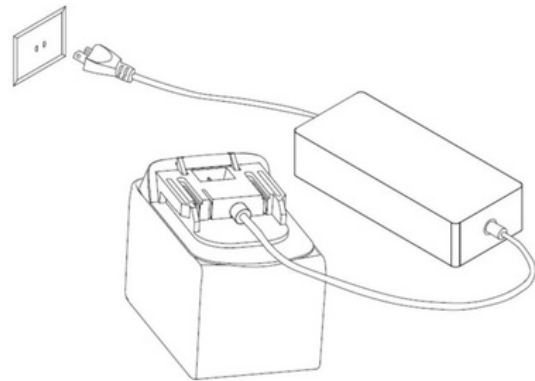

Power Display

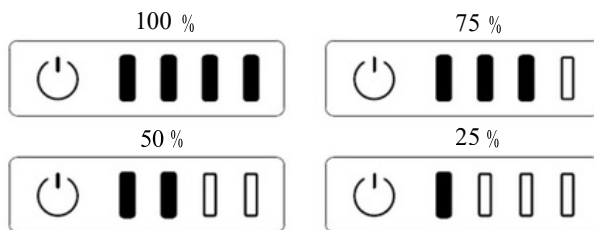**Important safety notes**

1. Ensure that battery and inflator are properly connected before each use.
2. Before operating, check your battery level.
3. Disconnect the battery and turn off LED light when inflator is not in use.
4. Do not operate your inflator in rainy environment.
5. The air vents must never be blocked during inflating.
6. In order to avoid short-circuiting and burning the circuit board, please turn off the red switch on the handle before replacing the battery.

